

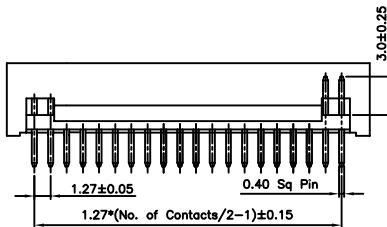


1.27mm(0.05") Pitch  
Box Header Connector

0313011

Vertical, Through Hole

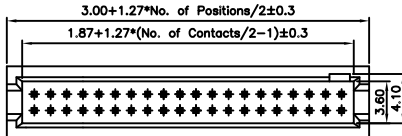

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0313011-100102	56	0313011-560102
12	0313011-120102	58	0313011-580102
14	0313011-140102	60	0313011-600102
16	0313011-160102	62	0313011-620102
18	0313011-180102	64	0313011-640102
20	0313011-200102	66	0313011-660102
22	0313011-220102	68	0313011-680102
24	0313011-240102	70	0313011-700102
26	0313011-260102	72	0313011-720102
28	0313011-280102	74	0313011-740102
30	0313011-300102	76	0313011-760102
32	0313011-320102	78	0313011-780102
34	0313011-340102	80	0313011-800102
36	0313011-360102	82	0313011-820102
38	0313011-380102	84	0313011-840102
40	0313011-400102	86	0313011-860102
42	0313011-420102	88	0313011-880102
44	0313011-440102	90	0313011-900102
46	0313011-460102	92	0313011-920102
48	0313011-480102	94	0313011-940102
50	0313011-500102	96	0313011-960102
52	0313011-520102	98	0313011-980102
54	0313011-540102	100	0313011-1000102
56	0313011-560102		

1.27mm(0.05") Pitch  
Box Header Connector

0313012

Right Angle, Through Hole

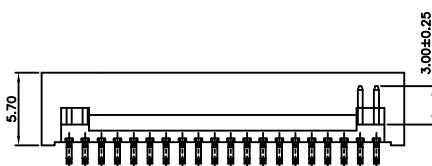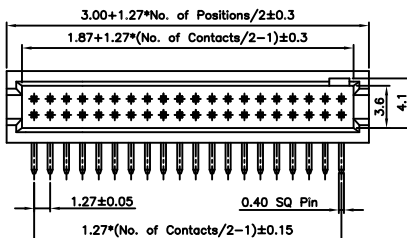

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish


Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0313012-100102	56	0313012-560102
12	0313012-120102	58	0313012-580102
14	0313012-140102	60	0313012-600102
16	0313012-160102	62	0313012-620102
18	0313012-180102	64	0313012-640102
20	0313012-200102	66	0313012-660102
22	0313012-220102	68	0313012-680102
24	0313012-240102	70	0313012-700102
26	0313012-260102	72	0313012-720102
28	0313012-280102	74	0313012-740102
30	0313012-300102	76	0313012-760102
32	0313012-320102	78	0313012-780102
34	0313012-340102	80	0313012-800102
36	0313012-360102	82	0313012-820102
38	0313012-380102	84	0313012-840102
40	0313012-400102	86	0313012-860102
42	0313012-420102	88	0313012-880102
44	0313012-440102	90	0313012-900102
46	0313012-460102	92	0313012-920102
48	0313012-480102	94	0313012-940102
50	0313012-500102	96	0313012-960102
52	0313012-520102	98	0313012-980102
54	0313012-540102	100	0313012-1000102
56	0313012-560102		

1.27mm(0.05") Pitch  
Box Header Connector

0313013

Vertical, SMT

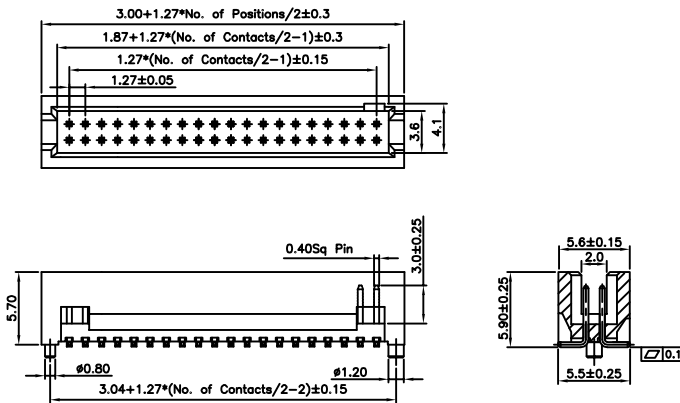

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish


Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0313013-100102	56	0313013-560102
12	0313013-120102	58	0313013-580102
14	0313013-140102	60	0313013-600102
16	0313013-160102	62	0313013-620102
18	0313013-180102	64	0313013-640102
20	0313013-200102	66	0313013-660102
22	0313013-220102	68	0313013-680102
24	0313013-240102	70	0313013-700102
26	0313013-260102	72	0313013-720102
28	0313013-280102	74	0313013-740102
30	0313013-300102	76	0313013-760102
32	0313013-320102	78	0313013-780102
34	0313013-340102	80	0313013-800102
36	0313013-360102	82	0313013-820102
38	0313013-380102	84	0313013-840102
40	0313013-400102	86	0313013-860102
42	0313013-420102	88	0313013-880102
44	0313013-440102	90	0313013-900102
46	0313013-460102	92	0313013-920102
48	0313013-480102	94	0313013-940102
50	0313013-500102	96	0313013-960102
52	0313013-520102	98	0313013-980102
54	0313013-540102	100	0313013-1000102
56	0313013-560102		

1.27mm(0.05") Pitch  
Box Header Connector

0313101

Vertical, Through Hole

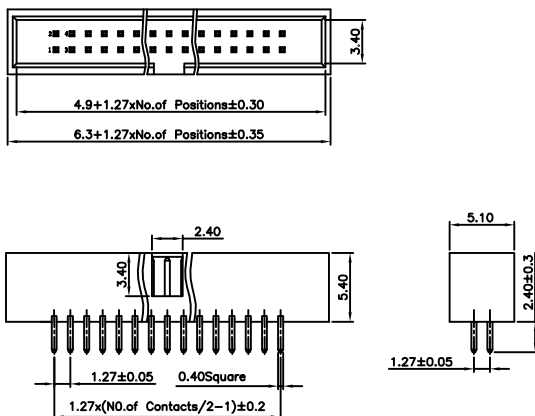

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish



Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0313101-100102	56	0313101-560102
12	0313101-120102	58	0313101-580102
14	0313101-140102	60	0313101-600102
16	0313101-160102	62	0313101-620102
18	0313101-180102	64	0313101-640102
20	0313101-200102	66	0313101-660102
22	0313101-220102	68	0313101-680102
24	0313101-240102	70	0313101-700102
26	0313101-260102	72	0313101-720102
28	0313101-280102	74	0313101-740102
30	0313101-300102	76	0313101-760102
32	0313101-320102	78	0313101-780102
34	0313101-340102	80	0313101-800102
36	0313101-360102	82	0313101-820102
38	0313101-380102	84	0313101-840102
40	0313101-400102	86	0313101-860102
42	0313101-420102	88	0313101-880102
44	0313101-440102	90	0313101-900102
46	0313101-460102	92	0313101-920102
48	0313101-480102	94	0313101-940102
50	0313101-500102	96	0313101-960102
52	0313101-520102	98	0313101-980102
54	0313101-540102	100	0313101-1000102
56	0313101-560102		

1.27mm(0.05") Pitch  
Box Header Connector

0313102

Right Angle, Through Hole

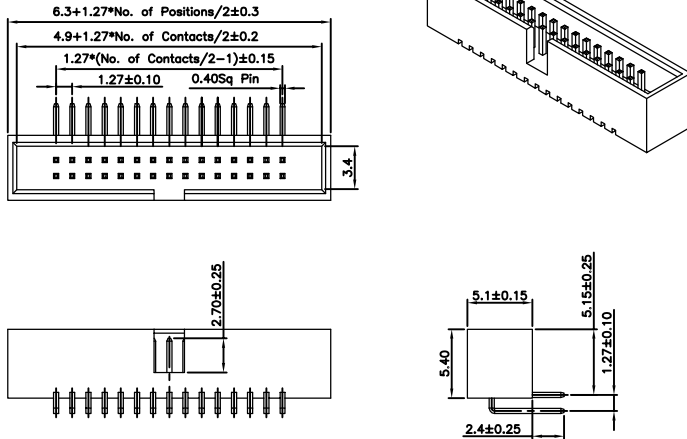

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish


Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0313102-100102	56	0313102-560102
12	0313102-120102	58	0313102-580102
14	0313102-140102	60	0313102-600102
16	0313102-160102	62	0313102-620102
18	0313102-180102	64	0313102-640102
20	0313102-200102	66	0313102-660102
22	0313102-220102	68	0313102-680102
24	0313102-240102	70	0313102-700102
26	0313102-260102	72	0313102-720102
28	0313102-280102	74	0313102-740102
30	0313102-300102	76	0313102-760102
32	0313102-320102	78	0313102-780102
34	0313102-340102	80	0313102-800102
36	0313102-360102	82	0313102-820102
38	0313102-380102	84	0313102-840102
40	0313102-400102	86	0313102-860102
42	0313102-420102	88	0313102-880102
44	0313102-440102	90	0313102-900102
46	0313102-460102	92	0313102-920102
48	0313102-480102	94	0313102-940102
50	0313102-500102	96	0313102-960102
52	0313102-520102	98	0313102-980102
54	0313102-540102	100	0313102-1000102
56	0313102-560102		

1.27mm(0.05") Pitch  
Box Header Connector

0313103

Vertical, SMT

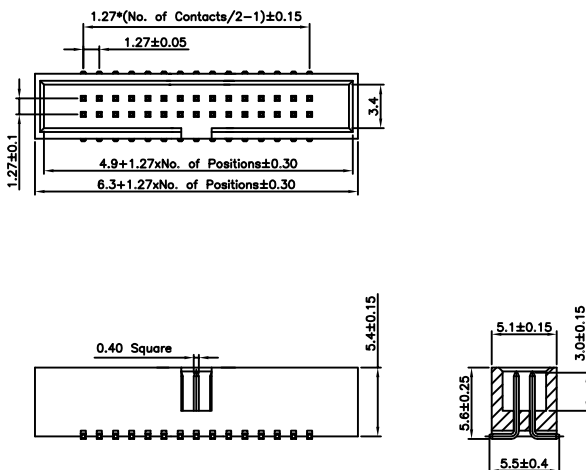

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0313103-100102	56	0313103-560102
12	0313103-120102	58	0313103-580102
14	0313103-140102	60	0313103-600102
16	0313103-160102	62	0313103-620102
18	0313103-180102	64	0313103-640102
20	0313103-200102	66	0313103-660102
22	0313103-220102	68	0313103-680102
24	0313103-240102	70	0313103-700102
26	0313103-260102	72	0313103-720102
28	0313103-280102	74	0313103-740102
30	0313103-300102	76	0313103-760102
32	0313103-320102	78	0313103-780102
34	0313103-340102	80	0313103-800102
36	0313103-360102	82	0313103-820102
38	0313103-380102	84	0313103-840102
40	0313103-400102	86	0313103-860102
42	0313103-420102	88	0313103-880102
44	0313103-440102	90	0313103-900102
46	0313103-460102	92	0313103-920102
48	0313103-480102	94	0313103-940102
50	0313103-500102	96	0313103-960102
52	0313103-520102	98	0313103-980102
54	0313103-540102	100	0313103-1000102
56	0313103-560102		

1.27mm(0.05") Pitch  
Box Header Connector

0313021

Vertical, Through Hole

Specifications

Rating


Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

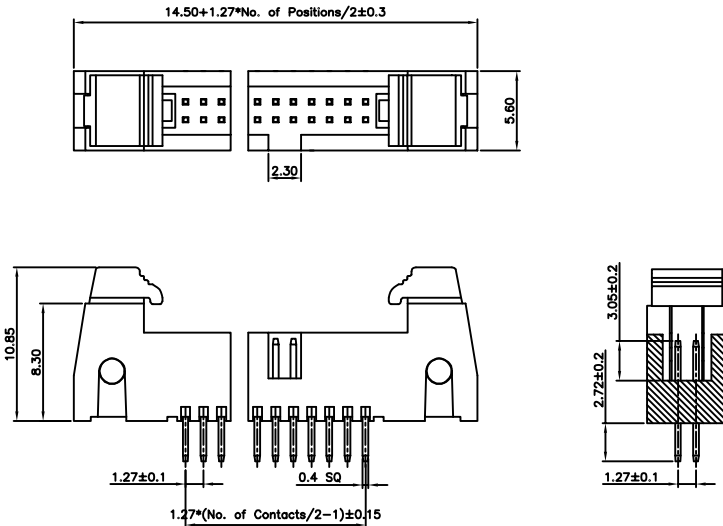

No. of CKTS	Part No.	No. of CKTS	Part No.
06	0313021-060102	34	0313021-340102
10	0313021-100102	40	0313021-400102
12	0313021-120102	44	0313021-440102
14	0313021-140102	50	0313021-500102
16	0313021-160102	60	0313021-600102
20	0313021-200102	64	0313021-640102
26	0313021-260102	66	0313021-660102
30	0313021-300102	68	0313021-680102

1.27mm(0.05") Pitch  
Box Header Connector

0313022

Right Angle, Through Hole

Specifications

Rating


Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

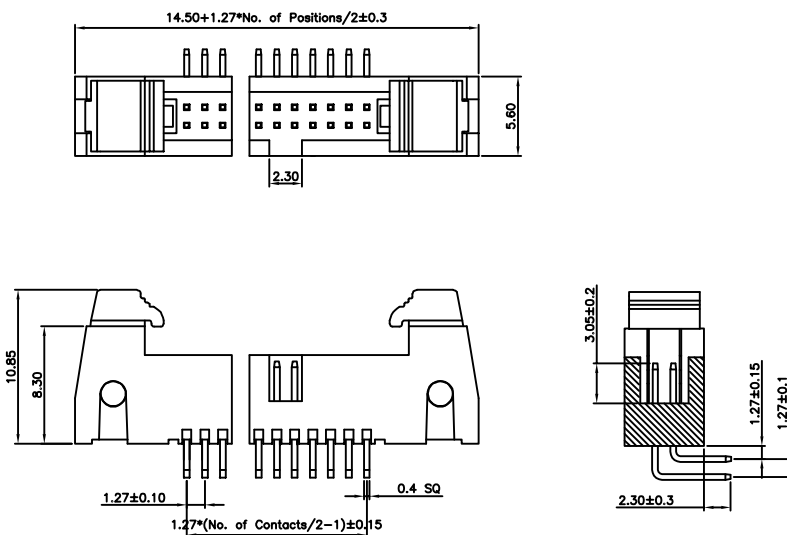

No. of CKTS	Part No.	No. of CKTS	Part No.
06	0313022-060102	34	0313022-340102
10	0313022-100102	40	0313022-400102
12	0313022-120102	44	0313022-440102
14	0313022-140102	50	0313022-500102
16	0313022-160102	60	0313022-600102
20	0313022-200102	64	0313022-640102
26	0313022-260102	66	0313022-660102
30	0313022-300102	68	0313022-680102

1.27mm(0.05") Pitch  
Box Header Connector

0313023  
Vertical, SMT

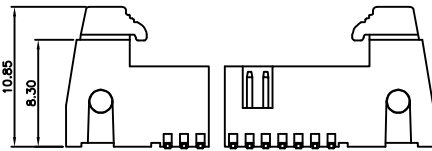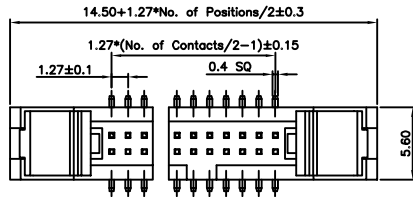

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute




Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
06	0313023-060102	34	0313023-340102
10	0313023-100102	40	0313023-400102
12	0313023-120102	44	0313023-440102
14	0313023-140102	50	0313023-500102
16	0313023-160102	60	0313023-600102
20	0313023-200102	64	0313023-640102
26	0313023-260102	66	0313023-660102
30	0313023-300102	68	0313023-680102

1.27mm(0.05") Pitch  
Box Header Connector

0313093  
Vertical, SMT

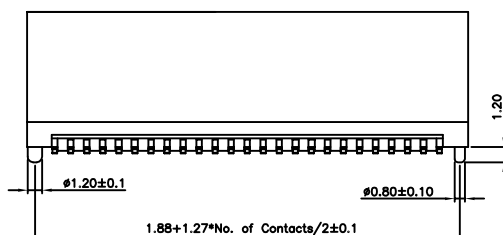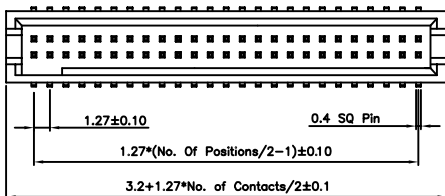

Specifications

Rating

Current Rating:1.0 Amp Max.  
Voltage Rating:100V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish



Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

P/N	DIM "H"	DIM "H1"
0313093-XX0302-099	7.40	9.90
0313093-XX0302-107	8.20	10.70
0313093-XX0302-115	9.00	11.50
0313093-XX0302-120	9.50	12.00
0313093-XX0302-127	10.20	12.70
0313093-XX0302-140	11.50	14.00
0313093-XX0302-146	12.10	14.60
0313093-XX0302-157	13.20	15.70
0313093-XX0302-178	15.30	17.80
0313093-XX0302-191	16.60	19.10

2.00mm(0.079") Pitch  
Box Header Connector

0320031

Vertical, Through Hole

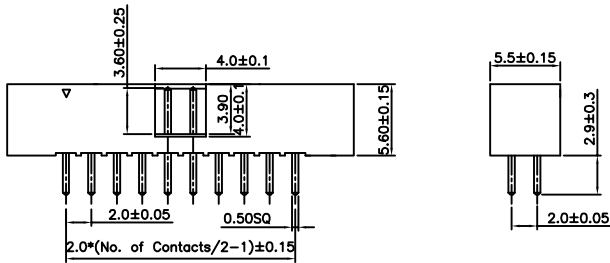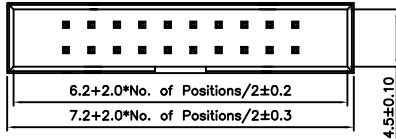

Specifications

Rating

Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish



Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
10	0320031-100102	26	0320031-260102
12	0320031-120102	30	0320031-300102
14	0320031-140102	34	0320031-340102
16	0320031-160102	40	0320031-400102
18	0320031-180102	44	0320031-440102
20	0320031-200102	50	0320031-500102
24	0320031-240102	68	0320031-680102

2.00mm(0.079") Pitch  
Box Header Connector

0320032

Right Angle, Through Hole

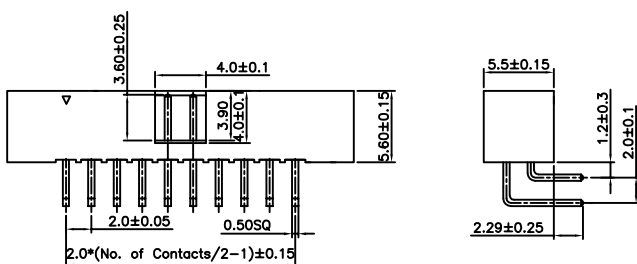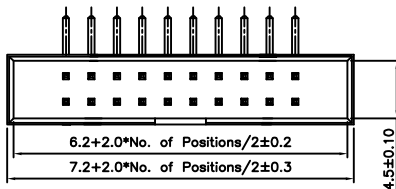

Specifications

Rating

Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
10	0320032-100102	26	0320032-260102
12	0320032-120102	30	0320032-300102
14	0320032-140102	34	0320032-340102
16	0320032-160102	40	0320032-400102
18	0320032-180102	44	0320032-440102
20	0320032-200102	50	0320032-500102
24	0320032-240102	68	0320032-680102

2.00mm(0.079") Pitch  
Box Header Connector

0320033

Vertical, SMT

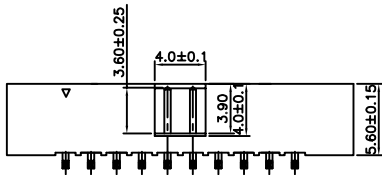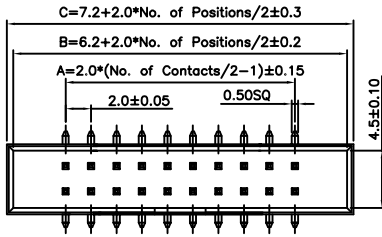

Specifications

Rating

Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
10	0320033-100102	26	0320033-260102
12	0320033-120102	30	0320033-300102
14	0320033-140102	34	0320033-340102
16	0320033-160102	40	0320033-400102
18	0320033-180102	44	0320033-440102
20	0320033-200102	50	0320033-500102
24	0320033-240102	68	0320033-680102

2.00mm(0.079") Pitch  
Box Header Connector

0320041

Vertical, Through Hole



Specifications

Rating

Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish


Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
04	0320041-040102	28	0320041-280102
06	0320041-060102	30	0320041-300102
08	0320041-080102	32	0320041-320102
10	0320041-100102	34	0320041-340102
12	0320041-120102	36	0320041-360102
14	0320041-140102	38	0320041-380102
16	0320041-160102	40	0320041-400102
18	0320041-180102	42	0320041-420102
20	0320041-200102	44	0320041-440102
22	0320041-220102	46	0320041-460102
24	0320041-240102	48	0320041-480102
26	0320041-260102	50	0320041-500102

2.00mm(0.079") Pitch  
Box Header Connector

0320042

Right Angle, Through Hole

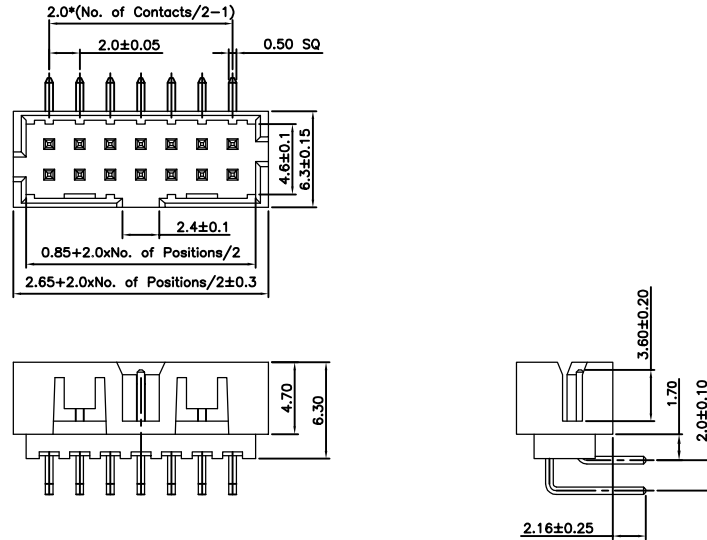

Specifications

Rating

Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish


Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
04	0320042-040102	28	0320042-280102
06	0320042-060102	30	0320042-300102
08	0320042-080102	32	0320042-320102
10	0320042-100102	34	0320042-340102
12	0320042-120102	36	0320042-360102
14	0320042-140102	38	0320042-380102
16	0320042-160102	40	0320042-400102
18	0320042-180102	42	0320042-420102
20	0320042-200102	44	0320042-440102
22	0320042-220102	46	0320042-460102
24	0320042-240102	48	0320042-480102
26	0320042-260102	50	0320042-500102

2.00mm(0.079") Pitch  
Box Header Connector

0320043

Vertical, SMT

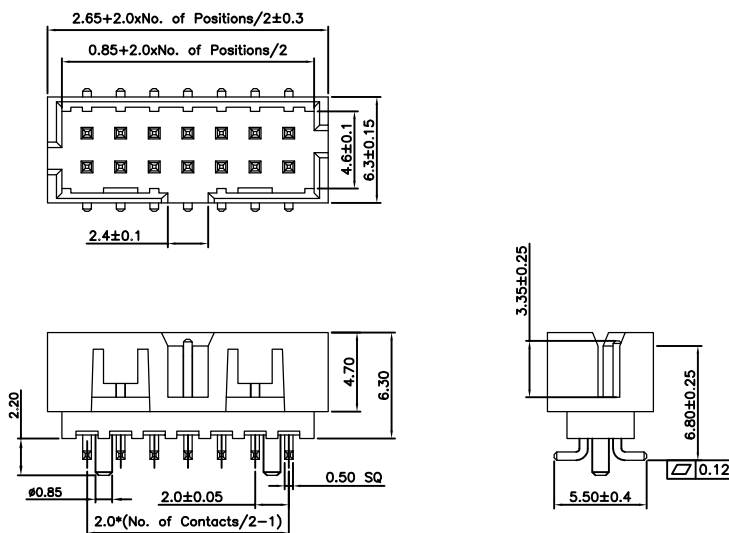

Specifications

Rating

Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
04	0320043-040102	28	0320043-280102
06	0320043-060102	30	0320043-300102
08	0320043-080102	32	0320043-320102
10	0320043-100102	34	0320043-340102
12	0320043-120102	36	0320043-360102
14	0320043-140102	38	0320043-380102
16	0320043-160102	40	0320043-400102
18	0320043-180102	42	0320043-420102
20	0320043-200102	44	0320043-440102
22	0320043-220102	46	0320043-460102
24	0320043-240102	48	0320043-480102
26	0320043-260102	50	0320043-500102



2.00mm(0.079") Pitch  
Box Header Connector

0320051

Vertical, Through Hole

Specifications

Rating




Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

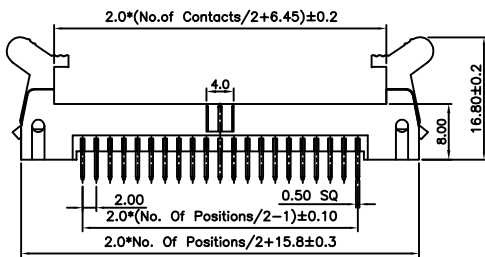

No. of CKTS	Part No.	No. of CKTS	Part No.
10	0320051-100102	30	0320051-300102
12	0320051-120102	34	0320051-340102
14	0320051-140102	40	0320051-400102
16	0320051-160102	44	0320051-440102
18	0320051-180102	50	0320051-500102
20	0320051-200102	60	0320051-600102
24	0320051-240102	64	0320051-640102
26	0320051-260102		

2.00mm(0.079") Pitch  
Box Header Connector

0320052

Right Angle, Through Hole

Specifications

Rating




Current Rating:2.0 Amp Max.  
Voltage Rating:150V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated


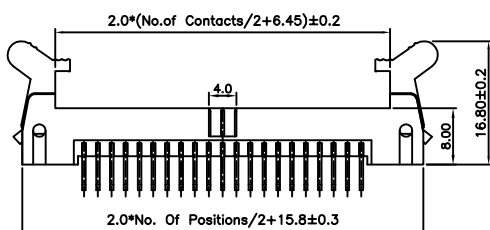
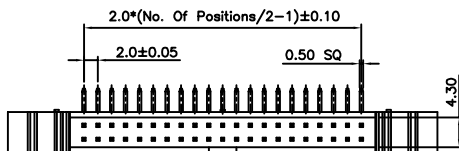


No. of CKTS	Part No.	No. of CKTS	Part No.
10	0320052-100102	30	0320052-300102
12	0320052-120102	34	0320052-340102
14	0320052-140102	40	0320052-400102
16	0320052-160102	44	0320052-440102
18	0320052-180102	50	0320052-500102
20	0320052-200102	60	0320052-600102
24	0320052-240102	64	0320052-640102
26	0320052-260102		

2.54mm(0.10") Pitch  
Box Header Connector

0326061

Vertical, Through Hole

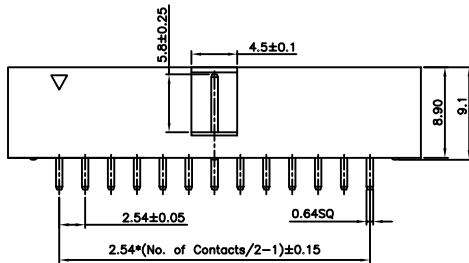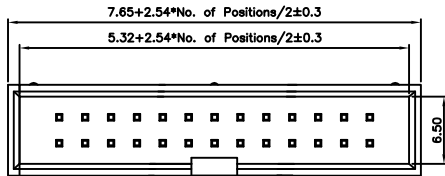

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
06	0326061-060002	34	0326061-340002
08	0326061-080002	40	0326061-400002
10	0326061-100002	42	0326061-420002
12	0326061-120002	44	0326061-440002
14	0326061-140002	46	0326061-460002
16	0326061-160002	48	0326061-480002
20	0326061-200002	50	0326061-500002
24	0326061-240002	60	0326061-600002
26	0326061-260002	68	0326061-680002
30	0326061-300002		

2.54mm(0.10") Pitch  
Box Header Connector

0326062

Right Angle, Through Hole

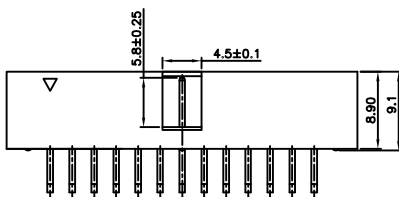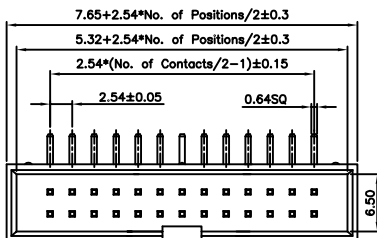

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
06	0326062-060002	34	0326062-340002
08	0326062-080002	40	0326062-400002
10	0326062-100002	42	0326062-420002
12	0326062-120002	44	0326062-440002
14	0326062-140002	46	0326062-460002
16	0326062-160002	48	0326062-480002
20	0326062-200002	50	0326062-500002
24	0326062-240002	60	0326062-600002
26	0326062-260002	68	0326062-680002
30	0326062-300002		

2.54mm(0.10") Pitch  
Box Header Connector

0326063

Vertical, SMT

Specifications

Rating


Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

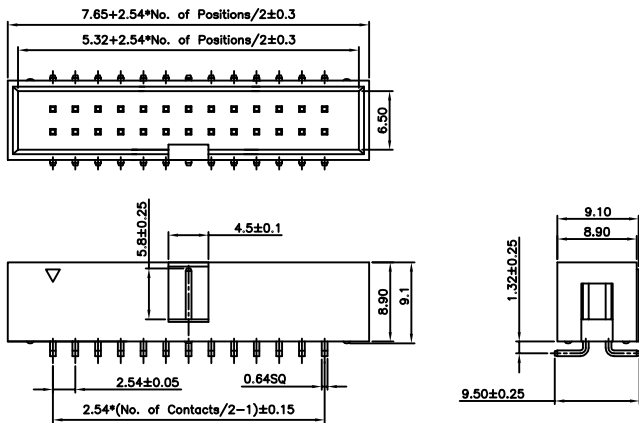

No. of CKTS	Part No.	No. of CKTS	Part No.
06	0326063-060102	34	0326063-340102
08	0326063-080102	40	0326063-400102
10	0326063-100102	42	0326063-420102
12	0326063-120102	44	0326063-440102
14	0326063-140102	46	0326063-460102
16	0326063-160102	48	0326063-480102
20	0326063-200102	50	0326063-500102
24	0326063-240102	60	0326063-600102
26	0326063-260102	68	0326063-680102
30	0326063-300102		

2.54mm(0.10") Pitch  
Box Header Connector

0326071

Vertical, Through Hole

Specifications

Rating


Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated



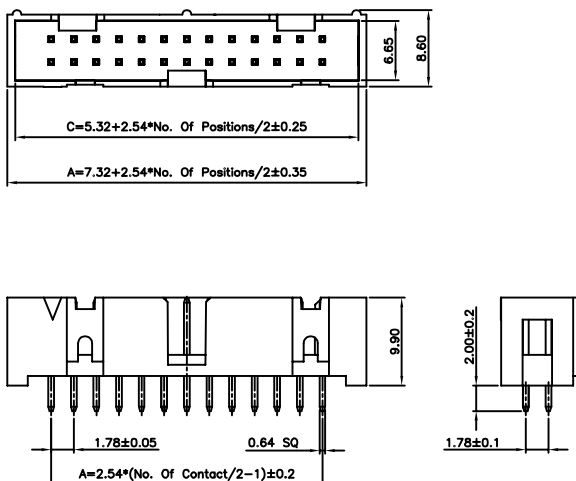


No. of CKTS	Part No.	No. of CKTS	Part No.
06	0326071-060002	26	0326071-260002
08	0326071-080002	30	0326071-300002
10	0326071-100002	34	0326071-340002
12	0326071-120002	36	0326071-360002
14	0326071-140002	40	0326071-400002
16	0326071-160002	50	0326071-500002
20	0326071-200002	60	0326071-600002
24	0326071-240002	64	0326071-640002

2.54mm(0.10") Pitch  
Box Header Connector

0326072

Right Angle, Through Hole

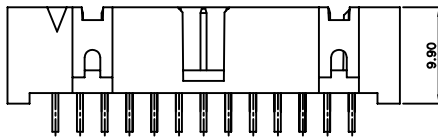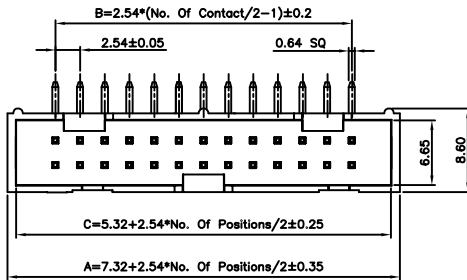

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
06	0326072-060002	26	0326072-260002
08	0326072-080002	30	0326072-300002
10	0326072-100002	34	0326072-340002
12	0326072-120002	36	0326072-360002
14	0326072-140002	40	0326072-400002
16	0326072-160002	50	0326072-500002
20	0326072-200002	60	0326072-600002
24	0326072-240002	64	0326072-640002

2.54mm(0.10") Pitch  
Box Header Connector

0326073

Vertical, SMT

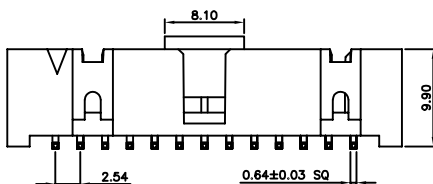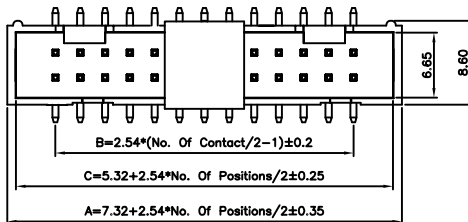

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish





Insulator:Nylon 6T UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
06	0326073-060102	26	0326073-260102
08	0326073-080102	30	0326073-300102
10	0326073-100102	34	0326073-340102
12	0326073-120102	36	0326073-360102
14	0326073-140102	40	0326073-400102
16	0326073-160102	50	0326073-500102
20	0326073-200102	60	0326073-600102
24	0326073-240102	64	0326073-640102

2.54mm(0.10") Pitch  
Box Header Connector

0326081

Vertical, Through Hole

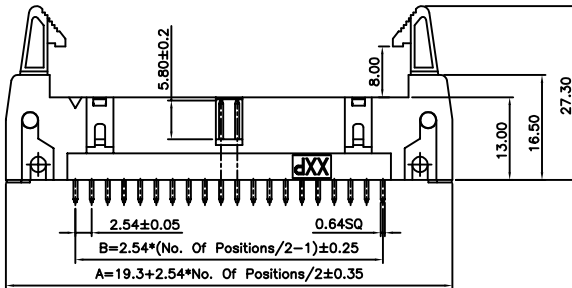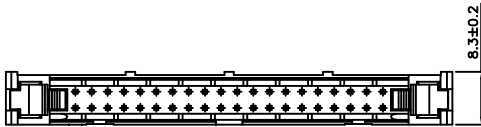

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish





Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
08	0326081-080002	34	0326081-340002
10	0326081-100002	40	0326081-400002
14	0326081-140002	50	0326081-500002
16	0326081-160002	60	0326081-600002
20	0326081-200002	64	0326081-640002
24	0326081-240002		
30	0326081-300002		

2.54mm(0.10") Pitch  
Box Header Connector

0326082

Right Angle, Through Hole

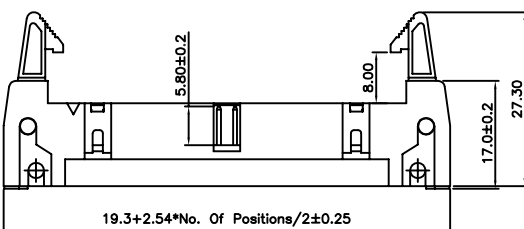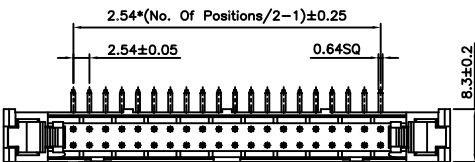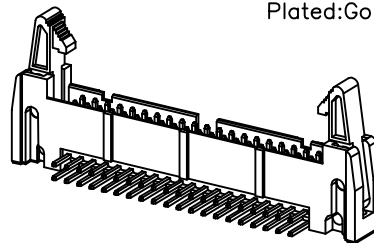

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
08	0326082-080002	34	0326082-340002
10	0326082-100002	40	0326082-400002
14	0326082-140002	50	0326082-500002
16	0326082-160002	60	0326082-600002
20	0326082-200002	64	0326082-640002
24	0326082-240002		
30	0326082-300002		

2.54mm(0.10") Pitch  
Box Header Connector

0326085

Vertical, Through Hole

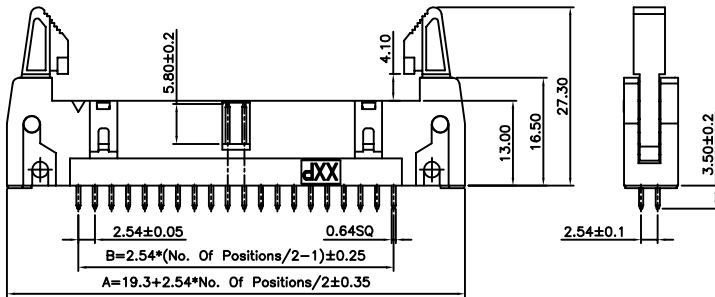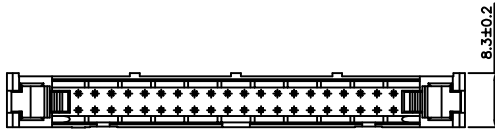

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish




Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
08	0326085-080002	34	0326085-340002
10	0326085-100002	40	0326085-400002
14	0326085-140002	50	0326085-500002
16	0326085-160002	60	0326085-600002
20	0326085-200002	64	0326085-640002
24	0326085-240002		
30	0326085-300002		

2.54mm(0.10") Pitch  
Box Header Connector

0326087

Right Angle, Through Hole

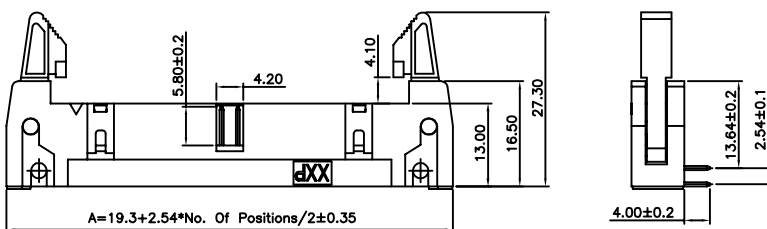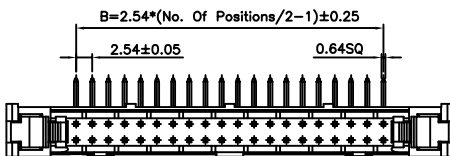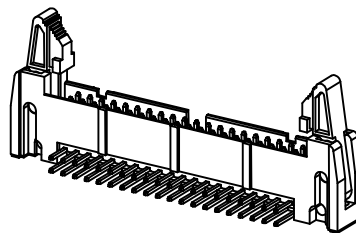

Specifications

Rating

Current Rating:3.0 Amp Max.  
Voltage Rating:250V AC/DC Max.  
Operating Temperature Range:-25°~+85°C

Electrical

Contact resistance:20m Ohm Max  
Insulator resistance:500M ohm min.  
Withstanding Voltage:500V AC/Minute

Material And Finish

Insulator:PBT UL94V-0 Color:Black  
Contact:Brass  
Plated:Gold Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
08	0326087-080002	34	0326087-340002
10	0326087-100002	40	0326087-400002
14	0326087-140002	50	0326087-500002
16	0326087-160002	60	0326087-600002
20	0326087-200002	64	0326087-640002
24	0326087-240002		
30	0326087-300002		